


FZ48-VB Datasheet N-Channel 60-V (D-S) MOSFET


PRODUCT	SUMMARY	
V _{DS} (V)	R_{DS(on)} (Ω)	I _D (A) ^a
60	0.011 at V _{GS} = 10 V	60
00	0.013 at V _{GS} = 4.5 V	50

FEATURES

- 175 °C Junction Temperature
- TrenchFET[®] Power MOSFET
- Material categorization:







N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS (T _C = 25	5 °C, unless otherv	vise noted)		
Parameter		Symbol	Limit	Unit
Gate-Source Voltage		V _{GS}	± 20	V
$C_{\text{extrimute}} = 0$	T _C = 25 °C	In -	60	
Continuous Drain Current (T _J = 175 °C) ^b	T _C = 100 °C		50ª	
Pulsed Drain Current	I _{DM}	200	A	
Continuous Source Current (Diode Conduction)		I _S	50ª	
Avalanche Current		I _{AS}	50	
Single Avalanche Energy (Duty Cycle \leq 1 %)	L = 0.1 mH	E _{AS}	125	mJ
Maximum Power Dissipation	T _C = 25 °C	Pn -	136	w
	T _A = 25 °C		3 ^b , 8.3 ^{b, c}	V
Operating Junction and Storage Temperature Range		T _J , T _{stg}	- 55 to 175	°C

THERMAL RESISTANCE RATINGS						
Parameter		Symbol	Typical	Maximum	Unit	
	$t \le 10 \text{ sec}$	R _{thJA}	15	18		
Maximum Junction-to-Ambient ^a	Steady State		40	50	°C/W	
Maximum Junction-to-Case		R _{thJC}	0.85	1.1		

Notes:

a. Package limited.

b. Surface mounted on 1" x 1" FR4 board.

c. $t \leq 10$ s.

$\begin{array}{ c c c c } \hline Parameter & Symbol & Test Conditions & I \\ \hline Static & & & & \\ \hline Drain-Source Breakdown Voltage & V_{DS} & V_{GS} = 0 \ V, \ I_D = 250 \ \mu A & & \\ \hline Gate Threshold Voltage & V_{DS} & V_{DS} = V_{GS}, \ I_D = 250 \ \mu A & & \\ \hline Gate-Body \ Leakage & I_{GSS} & V_{DS} = 0 \ V, \ V_{GS} = \pm 20 \ V & \\ \hline Cate - Body \ Leakage & I_{GSS} & V_{DS} = 0 \ V, \ V_{GS} = \pm 20 \ V & \\ \hline Cate - Body \ Leakage & I_{GSS} & V_{DS} = 0 \ V, \ V_{GS} = \pm 20 \ V & \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 125 \ ^{\circ}C & \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 125 \ ^{\circ}C & \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{DS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 15 \ A & \\ \hline Dynamic & & \\ \hline Input \ Capacitance & C_{iss} & \\ \hline Output \ Capacitance & C_{iss} & \\ \hline Output \ Capacitance & C_{iss} & \\ \hline Total \ Gate \ Charge^{\circ} & Q_g & \\ \hline Gate-Source \ Charge^{\circ} & Q_g & \\ \hline Gate-Source \ Charge^{\circ} & Q_g & \\ \hline Turn-On \ Delay \ Time^{\circ} & t_{d(off)} & \\ \hline Rise \ Time^{\circ} & t_{d(off)} & \\ \hline Rise \ Time^{\circ} & t_{f} & \\ \hline Murce \ Charge & t_{f} & \\ \hline Source-Drain \ Diode \ Ratings \ and \ Characteristics \ (T_C = 25 \ ^{\circ}C) & \\ \hline \end{array}$					
$\begin{array}{c c c c c c } \mbox{Drain-Source Breakdown Voltage} & V_{DS} & V_{DS} = 0 \ V, \ I_D = 250 \ \mu A & I_D \\ \hline Gate Threshold Voltage & I_{GSC} & V_{DS} = 0 \ V, \ V_{DS} = 250 \ \mu A & I_D \\ \hline Gate-Body \ Leakage & I_{GSS} & V_{DS} = 0 \ V, \ V_{GS} = 20 \ V & V_{DS} = 60 \ V, \ V_{GS} = 0 \ V & V_{DS} = 60 \ V, \ V_{GS} = 0 \ V & V_{DS} = 60 \ V, \ V_{GS} = 0 \ V & V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 125 \ ^{\circ}C & V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 175 \ ^{\circ}C & V_{DS} = 60 \ V, \ V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V & V_{DS} = 50 \ V, \ V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 125 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 0 \ V, \ V_{DS} = 25 \ V, \ f = 1 \ MHz & A \ A \ A \ A \ A \ A \ A \ A \ A \ A$	Min.	Typ.ª	Max.	Unit	
$ \begin{array}{c c c c c } \hline Gate Threshold Voltage & V_{GS(th)} & V_{DS} = V_{GS}, I_D = 250 \ \mu A \\ \hline Gate-Body Leakage & I_{GSS} & V_{DS} = 0 \ V, V_{GS} = \pm 20 \ V \\ \hline V_{DS} = 60 \ V, V_{GS} = 0 \ V, V_{GS} = 0 \ V \\ \hline V_{DS} = 60 \ V, V_{GS} = 0 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, V_{GS} = 0 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, V_{GS} = 0 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, V_{GS} = 0 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 10 \ V, \ I_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ I_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A \ I_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A \ I_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A \ I_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A \ I_J = 175 \ ^{\circ}C \\ \hline \hline Dynamic \ Input \ Capacitance \ C_{iss} \\ \hline Output \ Capacitance \ C_{iss} \\ \hline Output \ Capacitance \ C_{iss} \\ \hline Cotal \ Gate \ Charge^{\circ} \ Q_{g} \\ \hline Gate \ Source \ Charge^{\circ} \ Q_{g} \\ \hline Gate \ Source \ Charge^{\circ} \ Q_{g} \\ \hline Gate \ Charge^{\circ} \ Q_{g} \\ \hline Gate \ Charge^{\circ} \ Q_{g} \\ \hline Gate \ Charge^{\circ} \ Q_{g} \\ \hline Turn-On \ Delay \ Time^{\circ} \ I_t \ I_{d(on)} \\ \hline Rise \ Time^{\circ} \ I_t \ V_{DD} = 30 \ V, \ R_L = 0.6 \ \Omega \\ \hline \hline Rise \ Time^{\circ} \ I_t \ V_{GS} = 10 \ V, \ R_g = 2.5 \ \Omega \\ \hline \hline Fall \ Time^{\circ} \ I_t \ I_{d(off)} \ I_f \ I_{d(off)} \hline I_f \ I_f $			· I		
$ \begin{array}{c c} \mbox{Gate-Body Leakage} & I_{GSS} & V_{DS} = 0 \ V, \ V_{GS} = \pm 20 \ V \\ V_{DS} = 60 \ V, \ V_{GS} = 0 \ V \\ V_{DS} = 60 \ V, \ V_{GS} = 0 \ V \\ V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ U_{J} = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ U_{J} = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ U_{J} = 175 \ ^{\circ}C \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 10 \ V \\ \hline V_{DS} = 5 \ V, \ V_{GS} = 10 \ V \\ \hline V_{DS} = 5 \ V, \ V_{GS} = 10 \ V \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A, \ T_{J} = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 \ V, \ I_{D} = 20 \ A \\ \hline Dynamic \\ \hline Dynamic \\ \hline Dutput \ Capacitance \ C_{iss} \\ \hline Output \ Capacitance \ C_{iss} \\ \hline Output \ Capacitance \ C_{iss} \\ \hline Cotal \ Gate-Drain \ Charge^{\circ} \ Q_{g} \\ \hline Cater \ Charge^{\circ} \ Q_{g} \\ \hline Turn-On \ Delay \ Time^{\circ} \ t_{d(on)} \\ \hline Rise \ Time^{\circ} \ t_{d(on)} \\ \hline Rise \ Time^{\circ} \ t_{d(on)} \\ \hline Rise \ Time^{\circ} \ t_{d(off)} \\ \hline Fall \ Time^{\circ} \ t_{f} \\ \hline \ V_{DD} = 30 \ V, \ R_{L} = 0.6 \ \Omega \\ \hline \ D(Turn-Off \ Delay \ Time^{\circ} \ t_{d(off)} \\ \hline \ Turn-Off \ Delay \ Time^{\circ} \ t_{f} \\ \hline \ V_{DD} = 50 \ A, \ V_{GEN} = 10 \ V, \ R_{g} = 2.5 \ \Omega \\ \hline \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \$	60			V	
$ \begin{array}{c c c c c c c } Zero Gate Voltage Drain Current \\ I_{DSS} \\ \hline V_{DS} = 60 V, V_{GS} = 0 V, T_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 V, V_{GS} = 0 V, T_J = 125 \ ^{\circ}C \\ \hline V_{DS} = 60 V, V_{GS} = 0 V, T_J = 175 \ ^{\circ}C \\ \hline V_{DS} = 60 V, V_{GS} = 0 V, T_J = 175 \ ^{\circ}C \\ \hline V_{DS} = 60 V, V_{GS} = 10 V \\ \hline V_{DS} = 60 V, V_{GS} = 10 V \\ \hline V_{DS} = 5 V, V_{GS} = 10 V \\ \hline V_{DS} = 5 V, V_{GS} = 10 V \\ \hline V_{DS} = 10 V, I_D = 20 A \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 125 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A, T_J = 175 \ ^{\circ}C \\ \hline V_{GS} = 10 V, I_D = 20 A \\ \hline Dynamic \\ \hline Dynamic \\ \hline Dynamic \\ \hline Input Capacitance \\ C_{iss} \\ \hline Output Capacitance \\ C_{iss} \\ \hline Output Capacitance \\ C_{rss} \\ \hline Total Gate Charge^{\circ} \\ Capc \\ \hline Gate-Drain Charge^{\circ} \\ \hline Q_{gd} \\ \hline Cate-Source Charge^{\circ} \\ \hline Q_{gd} \\ \hline Turn-On Delay Time^{\circ} \\ \hline Turn-On Delay Time^{\circ} \\ \hline T_{d}(on) \\ \hline Rise Time^{\circ} \\ \hline T_{d}(onf) \\ \hline Fall Time^{\circ} \\ \hline t_{f} \\ \hline \end{array}$	1		3	v	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $			± 100	nA	
$ \begin{array}{ c c c c c } \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{DS} = 60 \ V, \ V_{GS} = 0 \ V, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{DS} = 5 \ V, \ V_{GS} = 10 \ V & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 125 \ ^{\circ}C & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & \\ \hline V_{GS} = 4.5 \ V, \ I_D = 15 \ A & \\ \hline \hline Dramic & \\ \hline Dramic & \\ \hline Dynamic & \\ \hline Dynamic & \\ \hline Dutput \ Capacitance & C_{iss} & \\ \hline Output \ Capacitance & C_{iss} & \\ \hline Output \ Capacitance & C_{rss} & \\ \hline Output \ Capacitance & C_{rss} & \\ \hline Total \ Gate \ Charge^{\circ} & Q_g & \\ \hline Gate \ Drain \ Charge^{\circ} & Q_{gs} & \\ \hline Gate \ Drain \ Charge^{\circ} & Q_{gs} & \\ \hline Cater \ Drain \ Charge^{\circ} & Q_{gs} & \\ \hline Turn \ On \ Delay \ Time^{\circ} & t_d(on) & \\ \hline Rise \ Time^{\circ} & t_d(on) & \\ \hline Rise \ Time^{\circ} & t_f & \\ \hline Turn \ Off \ Delay \ Time^{\circ} & t_f & \\ \hline Fall \ Time^{\circ} & t_f & \\ \hline \end{array}$			1		
$ \begin{array}{c c c c c c } On-State Drain Current^b & I_{D(on)} & V_{DS} = 5 \ V, \ V_{GS} = 10 \ V & V_{GS} = 10 \ V, \ I_D = 20 \ A & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 125 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 125 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C & V_{GS} = 4.5 \ V, \ I_D = 15 \ A & V_{GS} = 4.5 \ V, \ I_D = 15 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 2.5 \ \Omega & V_{DS} = 10 \ V, \ I_D = 2.5 \ \Omega & V_{DS} = 10 \ V, \ I_D = 2.5 \ \Omega & V_{DS} = 10 \ V, \ I_D = 2.5 \ \Omega & V_{DS} = 10 \ V, \ I_D = 2.5 \ \Omega & V_{DS} = 10 \ V, \ I_D $			50	μA	
$\begin{array}{c} \label{eq:constraint} \begin{array}{ c c c } & & & & & & & & & & & & & & & & & & &$			250		
$\begin{array}{c} \label{eq:result} \mbox{Prain-Source On-State Resistance}^b & R_{DS(on)} & \frac{V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 125 \ ^{\circ}C}{V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C} & V_{GS} = 10 \ V, \ I_D = 20 \ A, \ T_J = 175 \ ^{\circ}C} & V_{GS} = 4.5 \ V, \ I_D = 15 \ A & V_{GS} = 4.5 \ V, \ I_D = 15 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 15 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 50 \ A & V_{DS} = 10 \ V, \ I_D = 20 \ A & V_{DS} = 2.5 \ \Omega & V_{DS} = 10 \ V, \ I_D = $	60			А	
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		0.011		Ω	
$ \begin{array}{ c c c c c } \hline V_{GS} = 10 \text{ V}, \text{ I}_{D} = 20 \text{ A}, \text{ I}_{J} = 173 \text{ C} \\ \hline V_{GS} = 4.5 \text{ V}, \text{ I}_{D} = 15 \text{ A} \\ \hline V_{GS} = 4.5 \text{ V}, \text{ I}_{D} = 15 \text{ A} \\ \hline V_{GS} = 4.5 \text{ V}, \text{ I}_{D} = 20 \text{ A} \\ \hline \end{array} \\ \hline \hline \end{array} \\ \hline \hline$		0.014			
Forward Transconductanceb g_{fs} $V_{DS} = 15 \text{ V}, I_D = 20 \text{ A}$ DynamicInput Capacitance C_{iss} Output Capacitance C_{oss} VGS = 0 V, VDS = 25 V, f = 1 MHzReverse Transfer Capacitance C_{rss} Total Gate Chargec Q_g Gate-Source Chargec Q_{gs} Gate-Drain Chargec Q_{gd} Turn-On Delay Timec $t_{d(on)}$ Rise Timec t_r Turn-Off Delay Timec $t_{d(off)}$ Fall Timec t_f		0.018			
Dynamic C_{iss} $V_{GS} = 0 \ V, \ V_{DS} = 25 \ V, \ f = 1 \ MHz$ Input Capacitance C_{iss} Output Capacitance C_{oss} Reverse Transfer Capacitance C_{rss} Total Gate Charge ^c Q_g Gate-Source Charge ^c Q_{gs} Gate-Drain Charge ^c Q_{gd} Turn-On Delay Time ^c $t_{d(on)}$ Rise Time ^c t_r Turn-Off Delay Time ^c $t_{d(off)}$ Fall Time ^c t_f		0.013			
$\begin{array}{c c c c c c c c } \hline Input Capacitance & C_{iss} & & & & & & & & & & & & & & & & & & $		60		S	
$\begin{array}{ c c c c } \hline Output Capacitance & C_{oss} & V_{GS} = 0 \ V, \ V_{DS} = 25 \ V, \ f = 1 \ MHz & \hline \\ \hline \\ \hline Reverse Transfer Capacitance & C_{rss} & \hline \\ \hline \\ \hline Total Gate Charge^c & Q_g & \\ \hline \\ Gate-Source Charge^c & Q_{gs} & \hline \\ \hline \\ Gate-Drain Charge^c & Q_{gd} & \hline \\ \hline \\ \hline \\ \hline \\ Turn-On Delay Time^c & t_{d(on)} & \\ \hline \\ \hline \\ \hline \\ Rise Time^c & t_r & \\ \hline \\ \hline \\ \hline \\ Turn-Off Delay Time^c & t_{d(off)} & \\ \hline \\ \hline \\ Fall Time^c & t_f & \hline \\ \hline \end{array}$			· · · · · · · · · · · · · · · · · · ·		
$\begin{tabular}{ c c c c } \hline Reverse Transfer Capacitance & C_{rss} & & & & & & & & & & & & & & & & & & &$		4200		pF	
$ \begin{array}{c c} \hline Total \ Gate \ Charge^c & Q_g \\ \hline Gate-Source \ Charge^c & Q_{gs} \\ \hline Gate-Drain \ Charge^c & Q_{gd} \\ \hline Turn-On \ Delay \ Time^c & t_{d(on)} \\ \hline Rise \ Time^c & t_r \\ \hline Turn-Off \ Delay \ Time^c & t_{d(off)} \\ \hline Fall \ Time^c & t_f \\ \end{array} \\ \begin{array}{c} V_{DS} = 30 \ V, \ V_{GS} = 10 \ V, \ I_D = 50 \ A \\ \hline \\ V_{DD} = 30 \ V, \ R_L = 0.6 \ \Omega \\ I_D \cong 50 \ A, \ V_{GEN} = 10 \ V, \ R_g = 2.5 \ \Omega \\ \hline \end{array} $		570			
$ \begin{array}{c c} Gate-Source Charge^{\circ} & Q_{gs} \\ \hline Gate-Drain Charge^{\circ} & Q_{gd} \\ \hline Turn-On Delay Time^{\circ} & t_{d(on)} \\ \hline Rise Time^{\circ} & t_{r} \\ \hline Turn-Off Delay Time^{\circ} & t_{d(off)} \\ \hline Fall Time^{\circ} & t_{f} \end{array} \begin{array}{c} V_{DS} = 30 \text{ V}, $		325			
$\begin{array}{c c} \hline Gate Gate Gate Gate Gate Gate Gate Gate$		47			
$\begin{tabular}{ c c c c c c } \hline Turn-On \ Delay \ Time^c & t_{d(on)} \\ \hline Rise \ Time^c & t_r & \\ \hline Turn-Off \ Delay \ Time^c & t_{d(off)} & \\ \hline Fall \ Time^c & t_f & \\ \hline \hline \end{tabular}$		10		nC	
$\begin{tabular}{lllllllllllllllllllllllllllllllllll$		12			
$\begin{tabular}{lllllllllllllllllllllllllllllllllll$		10	20		
Fall Time ^c t _f		15	25	ns	
		35	50		
Source-Drain Diode Ratings and Characteristics ($T_C = 25 \ ^\circ C$)		20	30		
Pulsed Current I _{SM}			60	А	
Diode Forward Voltage V_{SD} $I_F = 20 \text{ A}, V_{GS} = 0 \text{ V}$		1	1.5	V	
Reverse Recovery Time t_{rr} $I_F = 20 \text{ A}, \text{ di/dt} = 100 \text{ A/}\mu\text{s}$		45	100	ns	

Notes:

a. For design aid only; not subject to production testing.

b. Pulse test; pulse width \leq 300 µs, duty cycle \leq 2 %.

c. Independent of operating temperature.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


.com

'Bsemi



TYPICAL CHARACTERISTICS (25 °C unless noted)

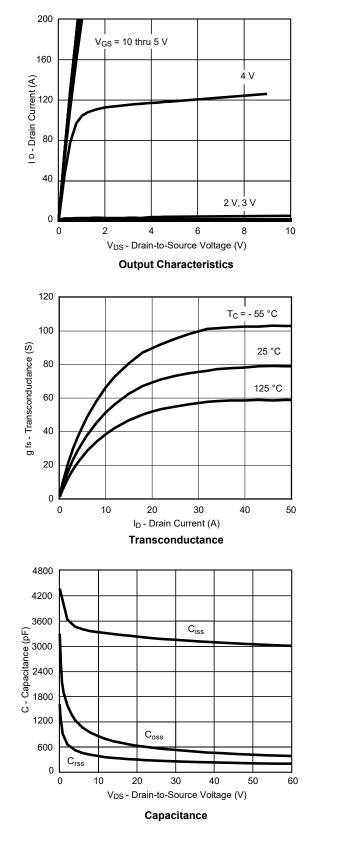


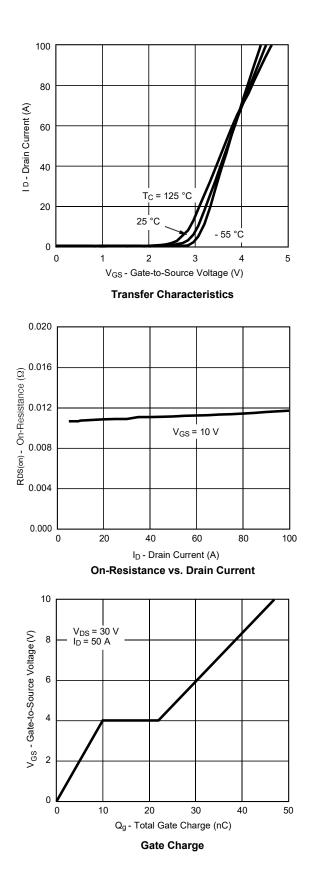

服务热线:400-655-8788




TYPICAL CHARACTERISTICS (25 °C unless noted)

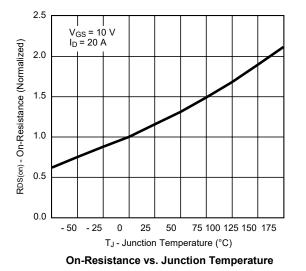

(Y) Hund of the second second

B[®]VBsemi www.VBsemi.com


THERMAL RATINGS

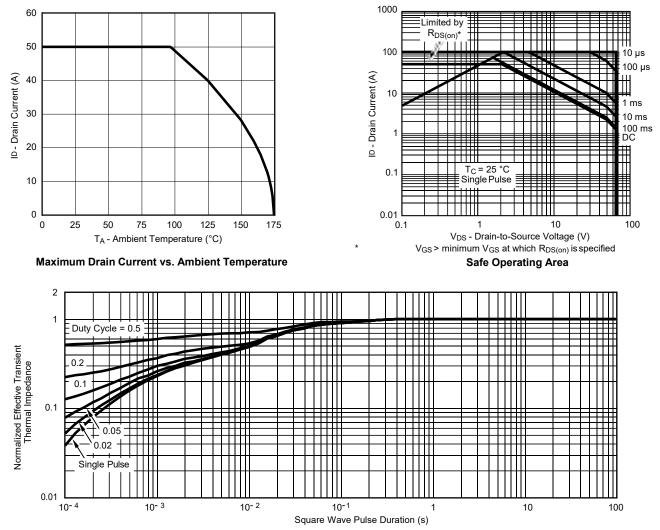

Normalized Thermal Transient Impedance, Junction-to-Case



TO-220AB

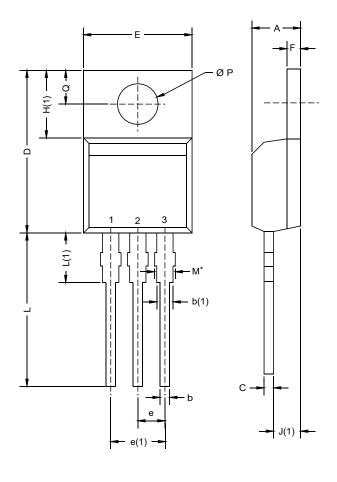

514	MILLIM	ETERS	INC	INCHES		
DIM.	MIN.	MAX.	MIN.	MAX.		
А	4.24	4.65	0.167	0.183		
b	0.69	1.02	0.027	0.040		
b(1)	1.14	1.78	0.045	0.070		
С	0.36	0.61	0.014	0.024		
D	14.33	15.85	0.564	0.624		
Е	9.96	10.52	0.392	0.414		
е	2.41	2.67	0.095	0.105		
e(1)	4.88	5.28	0.192	0.208		
F	1.14	1.40	0.045	0.055		
H(1)	6.10	6.71	0.240	0.264		
J(1)	2.41	2.92	0.095	0.115		
L	13.36	14.40	0.526	0.567		
L(1)	3.33	4.04	0.131	0.159		
ØР	3.53	3.94	0.139	0.155		
Q	2.54	3.00	0.100	0.118		
ECN: X15- DWG: 603	0364-Rev. C, 1	14-Dec-15				

Note

• M* = 0.052 inches to 0.064 inches (dimension including protrusion), heatsink hole for HVM



Disclaimer

All products due to improve reliability, function or design or for other reasons, product specifications and data are subject to change without notice.

Taiwan VBsemi Electronics Co., Ltd., branches, agents, employees, and all persons acting on its or their representatives (collectively, the "Taiwan VBsemi"), assumes no responsibility for any errors, inaccuracies or incomplete data contained in the table or any other any disclosure of any information related to the product.(www.VBsemi.com)

Taiwan VBsemi makes no guarantee, representation or warranty on the product for any particular purpose of any goods or continuous production. To the maximum extent permitted by applicable law on Taiwan VBsemi relinquished: (1) any application and all liability arising out of or use of any products; (2) any and all liability, including but not limited to special, consequential damages or incidental; (3) any and all implied warranties, including a particular purpose, non-infringement and merchantability guarantee.

Statement on certain types of applications are based on knowledge of the product is often used in a typical application of the general product VBsemi Taiwan demand that the Taiwan VBsemi of. Statement on whether the product is suitable for a particular application is non-binding. It is the customer's responsibility to verify specific product features in the products described in the specification is appropriate for use in a particular application. Parameter data sheets and technical specifications can be provided may vary depending on the application and performance over time. All operating parameters, including typical parameters must be made by customer's technical experts validated for each customer application. Product specifications do not expand or modify Taiwan VBsemi purchasing terms and conditions, including but not limited to warranty herein.

Unless expressly stated in writing, Taiwan VBsemi products are not intended for use in medical, life saving, or life sustaining applications or any other application. Wherein VBsemi product failure could lead to personal injury or death, use or sale of products used in Taiwan VBsemi such applications using client did not express their own risk. Contact your authorized Taiwan VBsemi people who are related to product design applications and other terms and conditions in writing.

The information provided in this document and the company's products without a license, express or implied, by estoppel or otherwise, to any intellectual property rights granted to the VBsemi act or document. Product names and trademarks referred to herein are trademarks of their respective representatives will be all.

Material Category Policy

Taiwan VBsemi Electronics Co., Ltd., hereby certify that all of the products are determined to be RoHS compliant and meets the definition of restrictions under Directive of the European Parliament 2011/65 / EU, 2011 Nian. 6. 8 Ri Yue restrict the use of certain hazardous substances in electrical and electronic equipment (EEE) - modification, unless otherwise specified as inconsistent.(www.VBsemi.com)

Please note that some documents may still refer to Taiwan VBsemi RoHS Directive 2002/95 / EC. We confirm that all products identified as consistent with the Directive 2002/95 / EC European Directive 2011/65 /.

Taiwan VBsemi Electronics Co., Ltd. hereby certify that all of its products comply identified as halogen-free halogen-free standards required by the JEDEC JS709A. Please note that some Taiwanese VBsemi documents still refer to the definition of IEC 61249-2-21, and we are sure that all products conform to confirm compliance with IEC 61249-2-21 standard level JS709A.